



ET 338

Elite Tweeter, Ø 110mm, 8Ω






Features:

- * 110mm IDR™ Improved Dispersion Recess design aluminum face plate
- * Large Hexatech™ aluminum voice coil
- * Replaceable Acuflex™ dome / coil assembly
- * Triple magnet system
- * High power handling
- * Sturdy gold plated input tags

SPECIFICATIONS

General Data	
Overall Dimensions	DxH 110mm(4.33")x66mm(2.59")
Nominal Power Handling (DIN)	P 200W
Transient Power 10ms	1000W
Sensitivity 1W/1M	92.5dB SPL
Frequency Response	1,800-20,000 Hz
Cone/Dome Material	Acuflex™ hand coated soft dome
Net Weight	Kg 1.08
Electrical Data	
Nominal Impedance	Z 8Ω
DC Resistance	Re 5.2Ω
Voice Coil Inductance @ 1KHz	LBM 0.09mH
Voice Coil and Magnet Parameters	
Voice Coil Diameter	DIA 28mm
Voice Coil Height	2.7mm
HE Magnetic Gap Height	HE 2.5mm
Max. Linear Excursion	X
Voice Coil Former	Aluminum
Voice Coil Wire	Hexatech™ Aluminum
Number Of Layers	2
Magnet System Type	Triple Ferrite
B Flux Density	B 1.95 T
BL Product	BXL 6.3 N.A
T-S Parameters	
Suspension Compliance	Cms
Mechanical Q Factor	Qms
Electrical Q Factor	Qes
Total Q Factor	Qts
Mechanical Resistance	Rms
Moving Mass	Mms 0.44 g
Eq. Gas Air Load (liters)	VAS
Resonant Frequency	Fs 700 Hz 10%
Effective Piston Area	SD 6.0 cm ²

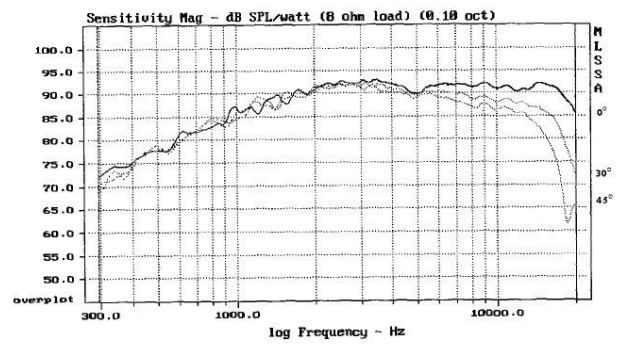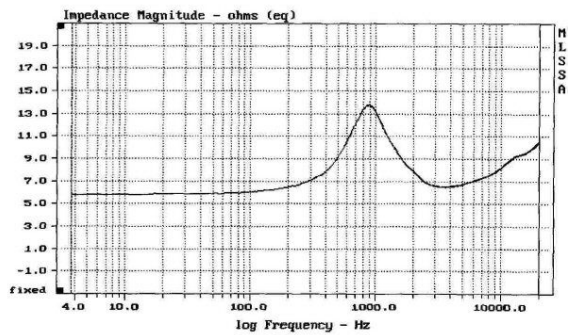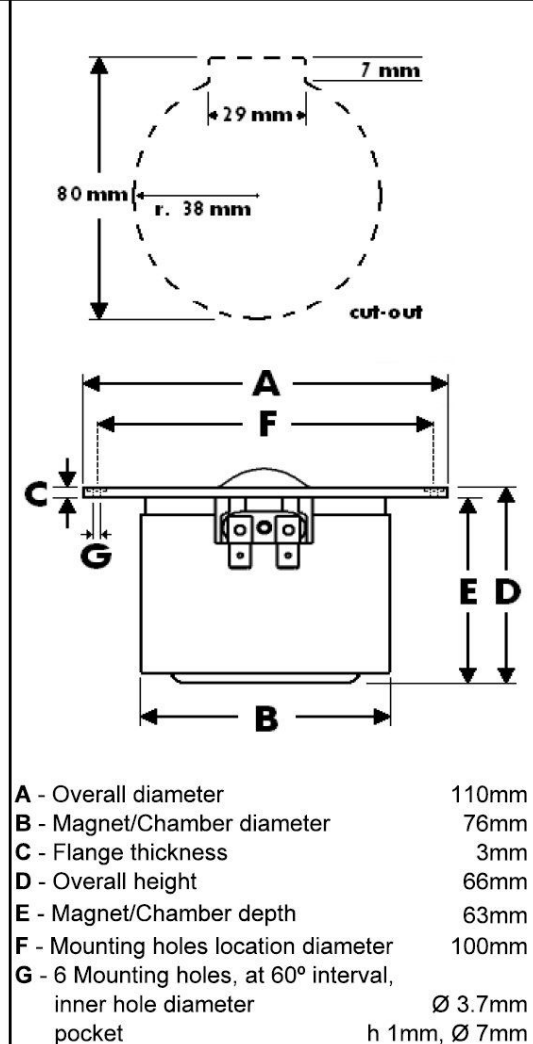

This model replaces former Morel MDT-33 model. Faceplate finish available in either Black or Silver

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.